


# SI- 110US31C

## Specification

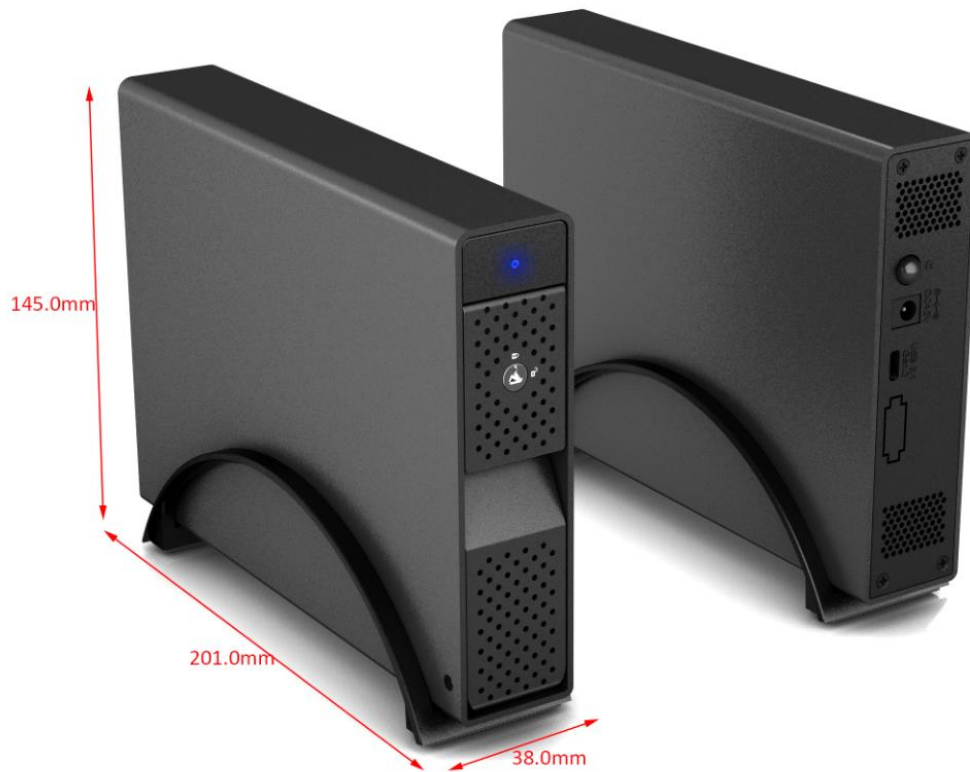

**Revision Notice**


<b>Rev.</b>	<b>Date</b>	<b>Description</b>
1.0	Mar.14.2020	First edition release.
1.1	Mar.17.2020	Update ID diagram and description.



## TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Power & Accessories.....	5

## 1. Appearance

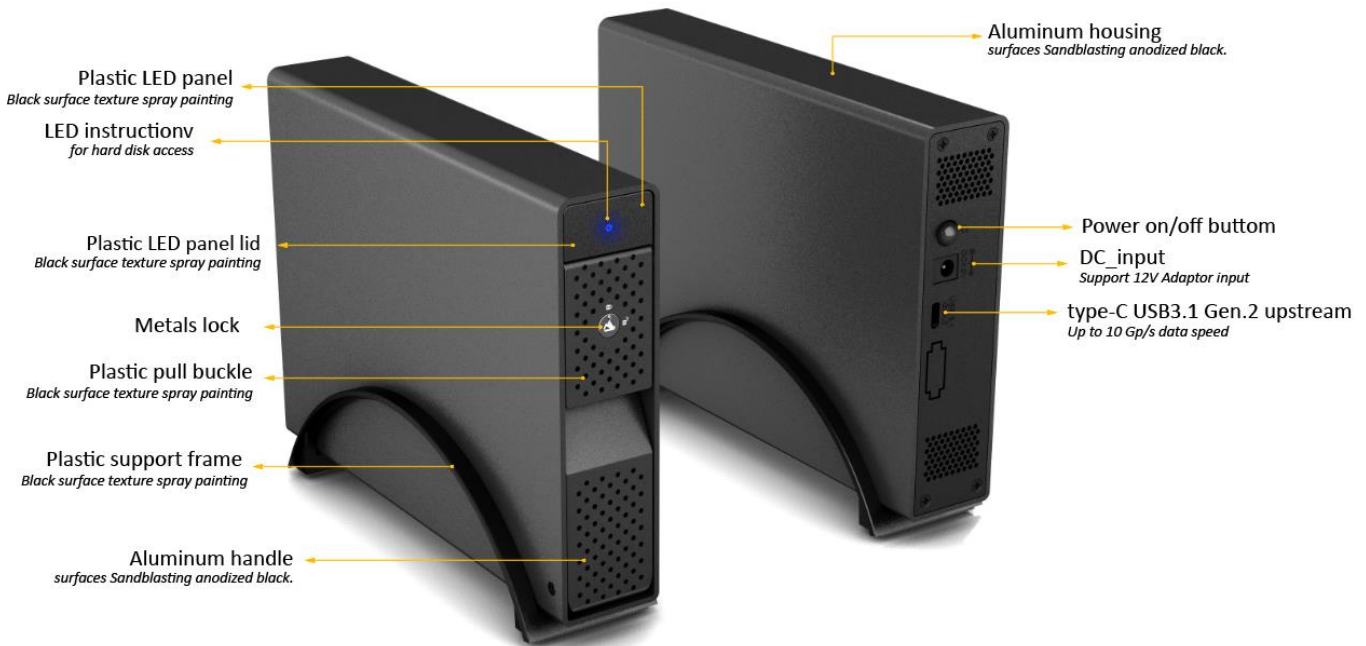

## 2. Specification

- A. 1 x USB3.1 Gen.2 Type-C upstream ports.
- B. 1 x DC\_Jack Socket.
- C. 1 x Power on/off switch.

## 3. Features

- A. High quality aluminum body for optimized heat dissipation.
- B. Dimensions: 201.00x145.00x38.00mm (exclude rubber feet pads).
- C. Functional LED: LED for Power and Activity indicator.
- D. Supports up to 1 x 2.5" SSD /3.5" SATA III HDD. Be compatible with any SATA II or III HDD.
- E. USB3.1 Gen2 type-C cable supports 10Gbps to Host, backward compatible with USB3.0 and USB2.0.

#### 4. Operating System Support

- A. Mac OS X 10.4 and future releases.
- B. Windows XP, VISTA, 7 SP1 32 and 64 bit, Windows 8/8.1/10 32 and 64 bit and future releases.

#### 5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

#### 6. Power & Accessories

- A. Retail Color Box x 1.
- B. User's manual x 1.
- C. Power Supply: External universal Power adaptor x 1 (12V/2A )
- D. USB 3.1 Gen 2 Type C to Type C Cable (no e-mark) 1 Meter. (Option)