

SI-1129HRUS31C

Specification




Revision Notice

Rev.	Date	Description
1.0	Oct.31.2019	Thirdly edition release.
1.1	Jan.17.2020	Modify the printing content of the rear window.

TABLE OF CONTENTS

1. Appearance	4
2. Specification	4
3. Features	5
4. Operating System Support.....	5
5. Environment	6
6. Power & Accessories	6

1. Appearance

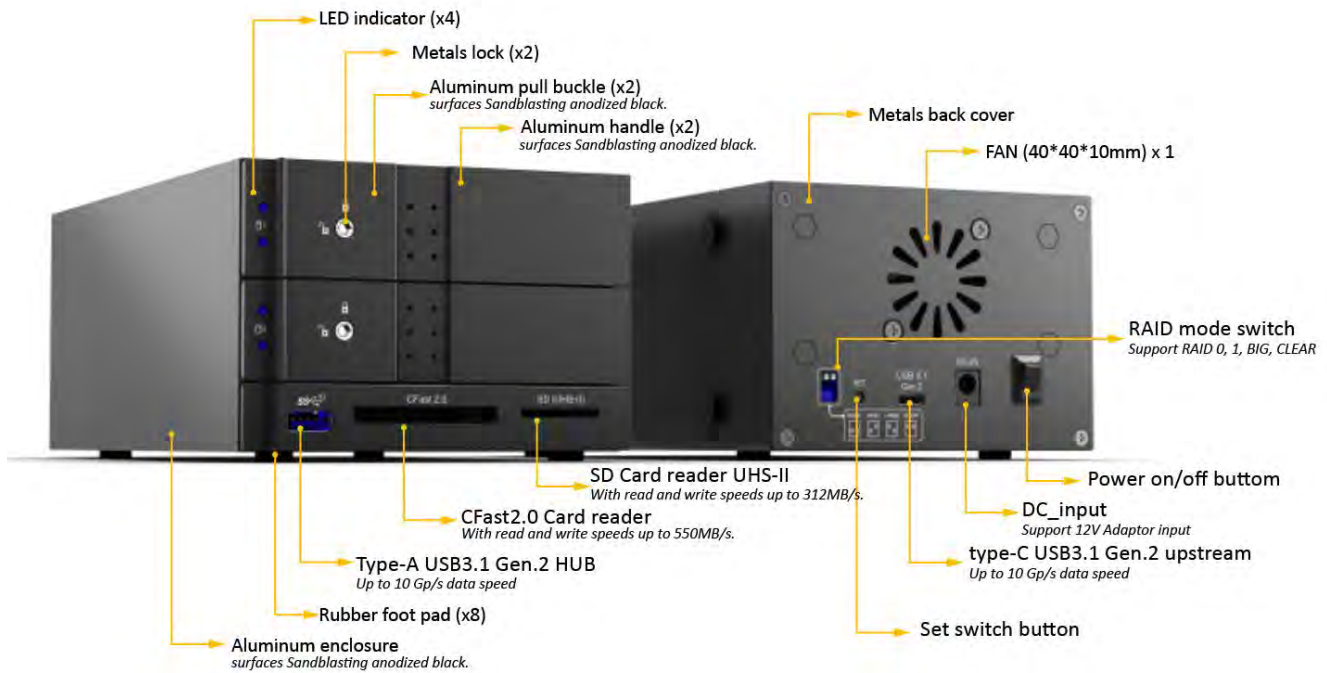

2. Specification

- A. 1 x USB3.1 Type-C upstream ports.
- B. 1 x RAID mode switch.
- C. 1 x set switch buttons.
- D. 1 x USB 3.1 Gen.2 TYPE-A HUB port.
- E. 1 x CFAST 2.0 Card reader.
- F. 1 x SD UHS-II Card reader.
- G. Design will include a power switch and DC power input receptacle.

3. Features

- A. High quality aluminum and metal for optimized heat dissipation.
- B. Dimensions: 211.0x117.0x80.8mm
- C. Can stand vertical or horizontally placed.
- D. Support USB 3.1 Type-C Gen .2 super speed up to 10Gbps.
- E. Support USB 3.1 Type-A Gen .2 Super speed up to 10Gbps hub.
- F. Supports up to 2 x 2.5" SSD /3.5" SATA III HDD. Be compatible with any SATA II or III HDD.
- G. Supports RAID 0, 1, JBOD, Standard (RAID 0, RAID 1 performance can over 800MB/s).
- H. Support CFAST 2.0 performance is up to 550 MB/s.
- I. Support SD(UHS-II) performance is up to 270MB/s.
- J. 2 X HDD LED indicator. Solid blue indicates drive is installed and powered up.
- K. Blinking purple indicates data communication with host computer.
- L. Use the 1 x 40*40*10 mm FAN for optimized heat dissipation.
- M. Backward compatible with USB 3.0/2.0/1.1.

4. Operating System Support

- A. Mac OS X 10.4 and future releases.
- B. Windows XP, VISTA, 7 SP1 32 and 64 bit, Windows 8/8.1/10 32 and 64 bit and future releases.

5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. User's manual x 1.
- B. Retail color Box x 1.
- C. Power Supply: External universal Power adaptor (12V/4A) x 1
- D. Power Adapter Plugs Cable (US) 1.2 Meter x 1PCS.
- E. USB Cable; USB3.1 Gen.2 Type-C to Type-C (no E-mark) 1 Meter x 1PCS.