

SI- 120RUS31C Specification




Revision Notice

Rev.	Date	Description
1.0	Mar.14.2020	First edition release.
1.1	Mar.17.2020	Update ID diagram and description.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Power & Accessories.....	5

1. Appearance

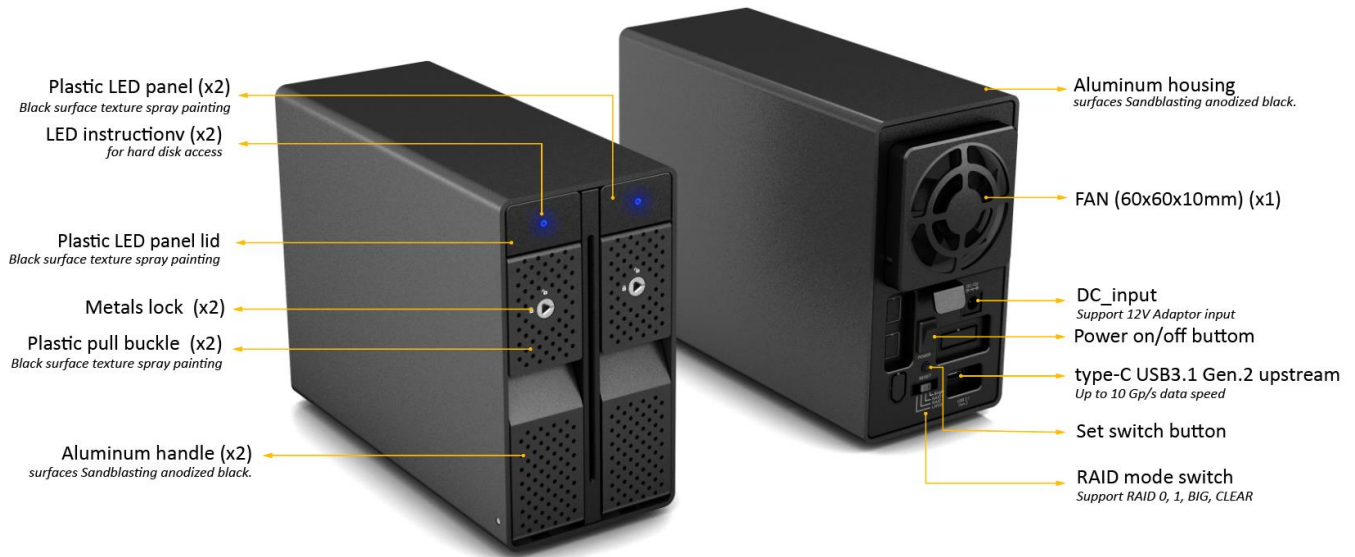

2. Specification

- A. 1 x USB3.1 Gen.2 Type-C upstream ports.
- B. 1 x RAID mode switch.
- C. 1 x set switch switch.
- D. 1 x DC_Jack Socket.
- E. 1 x Power on/off switch.

3. Features

- A. High quality aluminum body for optimized heat dissipation.
- B. Dimensions: 202.7x134.00x95.00mm (exclude rubber feet pads).
- C. Functional LED: LED for Power and Activity indicator.
- D. Supports up to 2 x 2.5" SSD /3.5" SATA III HDD. Be compatible with any SATA II or III HDD.
- E. USB3.1 Gen2 type-C captive cable supports 10Gbps to Host, backward compatible with USB3.0 and USB2.0.
- F. Supports RAID 0, 1, BIG, CLEAR (Using a 2.5-inch SSD RAID 0 performance can over 800MB/s).
- G. Use the 1 x 60*60*15 mm FAN for optimized heat dissipation.

4. Operating System Support

- H. Mac OS X 10.4 and future releases.
- I. Windows XP, VISTA, 7 SP1 32 and 64 bit, Windows 8/8.1/10 32 and 64 bit and future releases.

5. Environment

- J. Operating Temperature: 5°C ~ 55°C
- K. Operating Humidity: 20%RH ~ 80%RH
- L. Storage Temperature: -20°C ~ 50°C
- M. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- N. Retail Color Box x 1.
- O. User's manual x 1.
- P. Power Supply: External universal Power adaptor x 1 (12V/4A)
- Q. USB 3.1 Gen 2 Type C to Type C Cable (no e-mark) 1 Meter. (Option)