

SI-133US31C

Specification




Revision Notice

Rev.	Date	Description
1.0	Mar.30.2022	First edition release.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Power & Accessories.....	5

1. Appearance

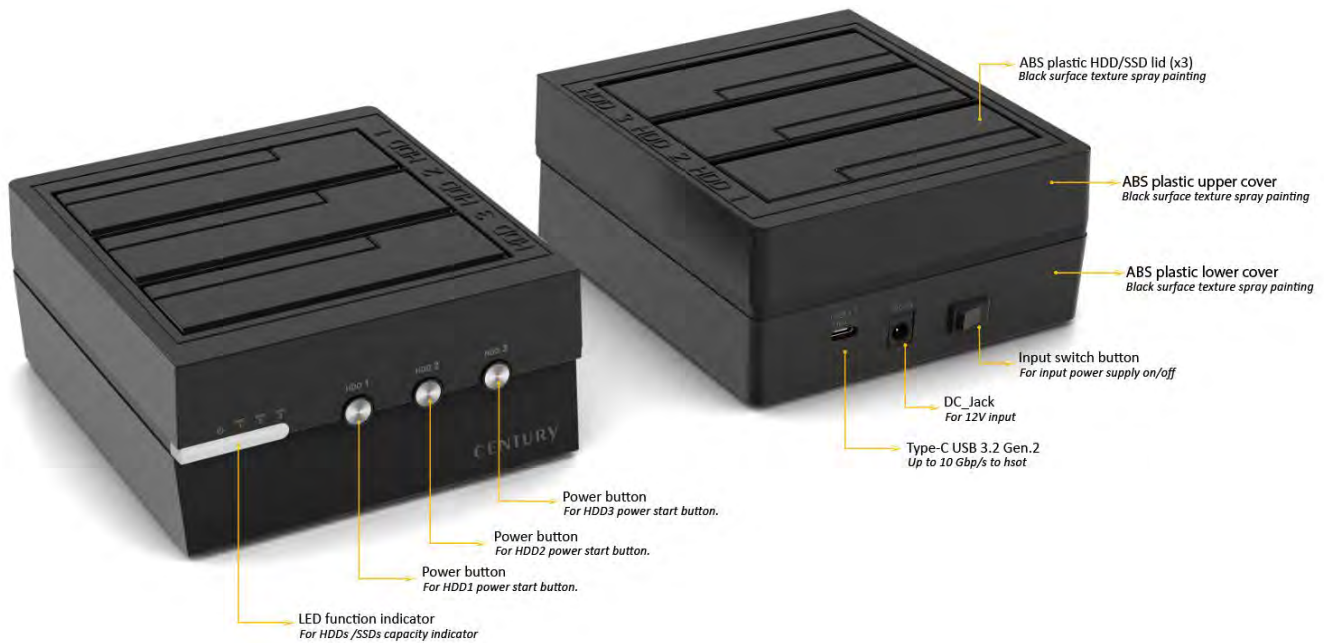

2. Specification

- A. 1 x USB3.2 Type-C Upstream Receptacle.
- B. 1 x 12V DC_Jack Receptacle.
- C. 1 x Input power Switch button
- D. 3 x SATA III socket (built-in).

3. Features

- A. High-strength ABS plastic.
- A. Dimensions: 140.0x127.0x61.0mm.
- B. Functional LED power & Activity indicator.

- A. Support 3x 3.5inch or 3 x 2.5inch SATA HDD/SSD. Be compatible with any SATA. Support 18TB HDD/2TB SSD or above.
- B. USB3.2 Gen2 Type-C Female connector supports 10Gbps to Host, backward compatible with USB3.0 /USB2.0 and USB1.1
- C. Supports SATA 2.5inch SSDs transfer speed up to 530MB/s. or SATA 3.5inch HDD transfer speed up to 6Gbps.
- D. Support 1 x Power button switch and 1 x LED indicator (press the [POWER switch] for power on, hold the [POWER switch] for 3seconds, power off.).
- E. Hot-Swappable .

4. Operating System Support

- A. Mac OS X 12.1 and future releases.
- B. Windows 8/8.1 32 and 64 bit, Windows 10/11 32 and 64 bit and future releases.

5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- E. Retail Color Box x 1.
- F. User's manual x 1.
- G. USB 3.1 Type A to Type C cable + C/A Adaptor x 1 meter.
- H. Power Supply: External universal Power adaptor x 1 (12V/4A)
- I. Power Adapter Plugs Cable (NA/JPN) 1.2 Meter x 1PCS.