

# SI-402CR

## Specification



## Revision Notice


**R.1.0 2018.01.22**

Second edition releas.

TABLE OF CONTENTS

1. Appearance .....	4
2. Specification .....	4
3. Features .....	4
4. Operating System Support.....	5
5. Environment .....	5
6. Power & Accessories .....	5

## 1. Appearance

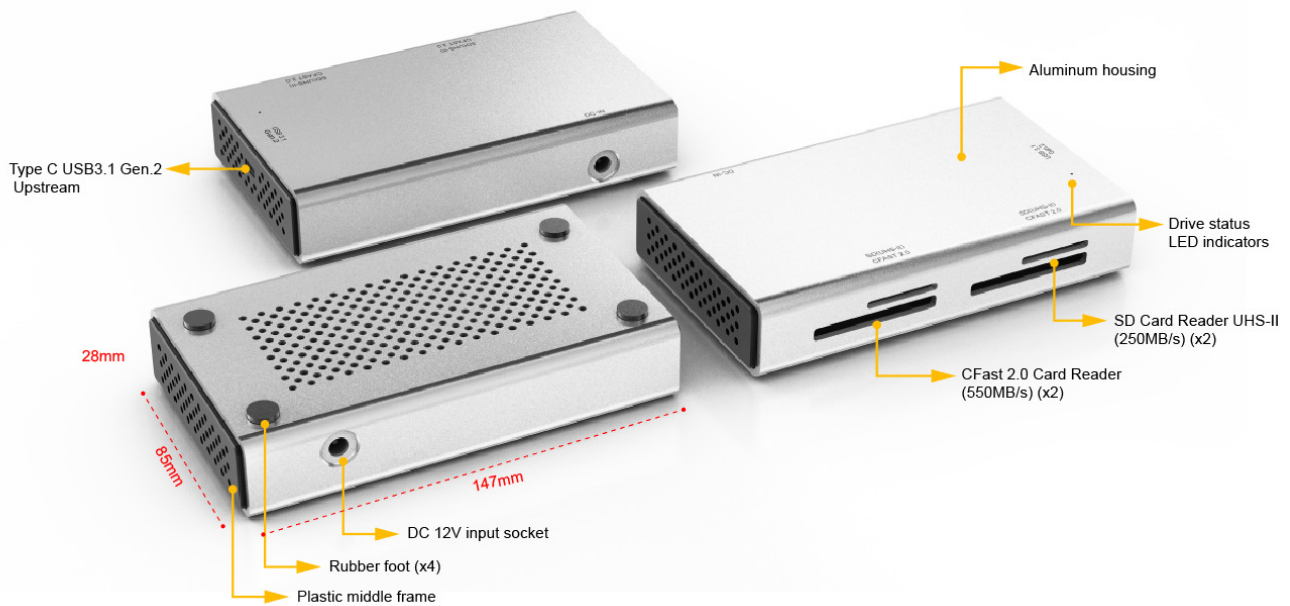

## 2. Specification

- A. 1 x USB3.1 Type C Receptacle.
- B. 2 x SD (UHS-II) Card Reader .
- C. 2 x CFast 2.0 Card Reader.
- D. 1 x LED for top surface .
- E. 1 x DC Power input.

## 3. Features

- A. High-strength ABS plastic and High quality metal for optimized heat dissipation.
- B. USB 3.1 Gen 2 super speed up to 10 Gbps.
- C. SD (UHS-II)Card Reader USH-II super speed up to 250MB/s. (Backward compatible older versions of SD).
- D. CFast 2.0 Card Reader super speed up to 550MB/s. (Backward compatible older versions of CFast)..

- E. Support bus power and DC power
- F. Top mounted drive LED for power.

#### **4. Operating System Support**

- A. Mac OS X 10.6.x and future releases.
- B. Windows VISTA, 7 32 and 64 bit, Windows 8/8.1/10 32 and 64 bit and future releases.

#### **5. Environment**

- A. Operating Temperature: 5°C ~ 35°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

#### **6. Power & Accessories**

- A. Retail Color Box x 1.
- B. USB 3.1 Gen.2 Type C to Type C cable x 1 meter.
- C. User's manual x 1.
- D. Adapter (US) 12V 2A x 1.