

# SI-4041SC

## Specification



## Revision Notice


**R.1.0 2019.09.23**

Initial release.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Power & Accessories.....	5

## 1. Appearance

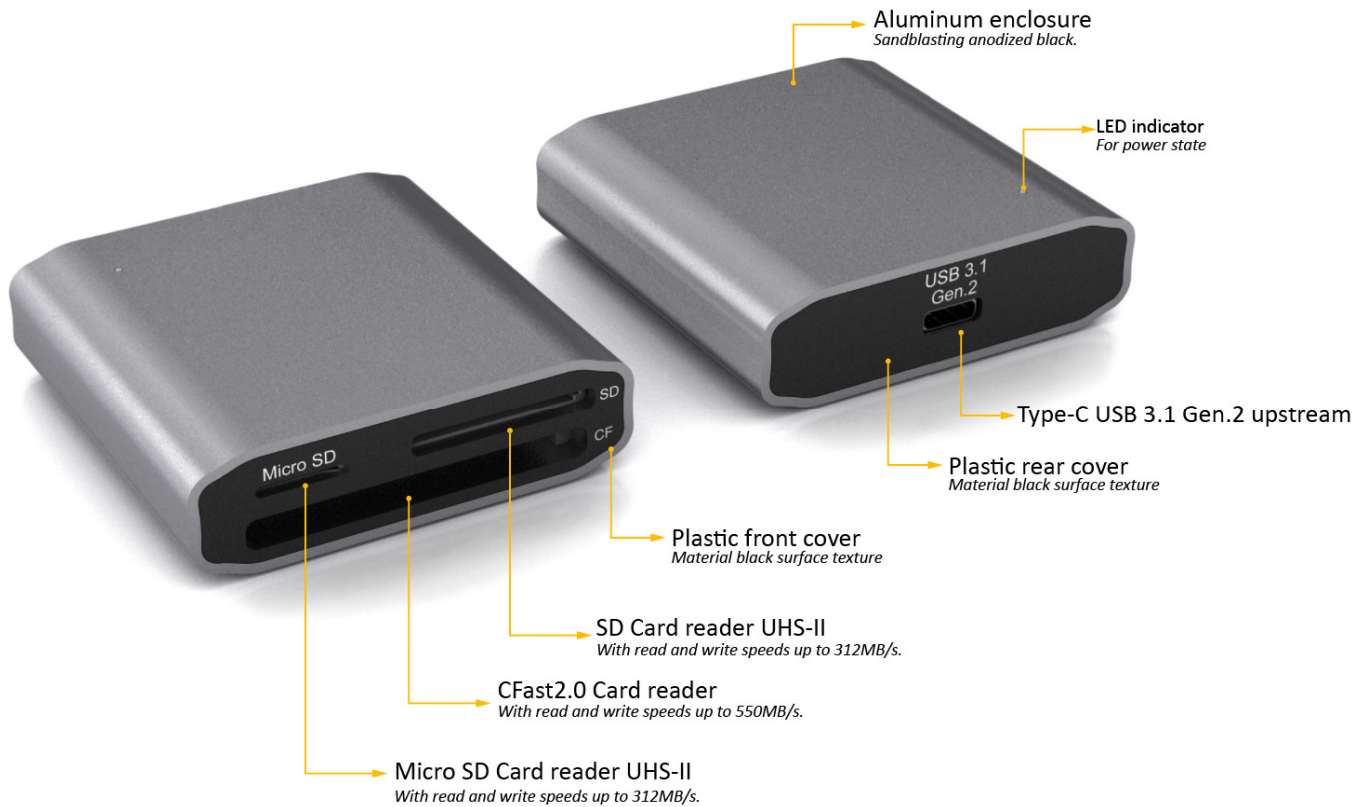

## 2. Specification

- A. 1 x SD UHS\_II card reader.
- B. 1 x USB Type\_c USB3.1 Gne.2 upstream receptacle.
- C. 1 x Micro SD UHS\_II card reader.
- D. 1 x CFast2.0 card reader.
- E. 1 x LED for Power state.

## 3. Features

- A. High quality Aluminum body for optimized heat dissipation.
- B. Dimensions:61.0 x 61.0 x 18.0mm.

- C. Functional LED for Power on/off.
- D. Support upstream USB3.1 Gen.2 Type-C up to 10Gbps data speed.
- E. Support SD (UHS-II) Card Reader port, super speed up to 312MB/s. (Backward compatible older versions of SD).
- F. Support micro SD (UHS-II) Card Reader port, super speed up to 312MB/s. (Backward compatible older versions of SD).
- G. Support CFast2.0 Card Reader x2 ports, super speed up to 550MB/s. (Backward compatible older versions of CFast card).
- H. Support bus power.

#### **4. Operating System Support**

- A. Mac OS X 10.14.4 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit, Windows 10 32 and 64 bit and future releases.

#### **5. Environment**

- A. Operating Temperature: 0°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 60°C
- D. Storage Humidity: 20%RH ~ 80%RH

#### **6. Power & Accessories**

- A. Retail Color Box x 1.
- B. User's manual x 1.
- C. USB 3.1 Gen.2 Type C to Type C cable x 0.15 meter. (Option)