

SI- 495U3PV_Plus

Specification



Revision Notice


R.1.0 2019.08.02

First edition release.

TABLE OF CONTENTS

1. Appearance	4
2. Specification	4
3. Features	5
4. Operating System Support.....	5
5. Environment	5
6. Power & Accessories	6

1. Appearance

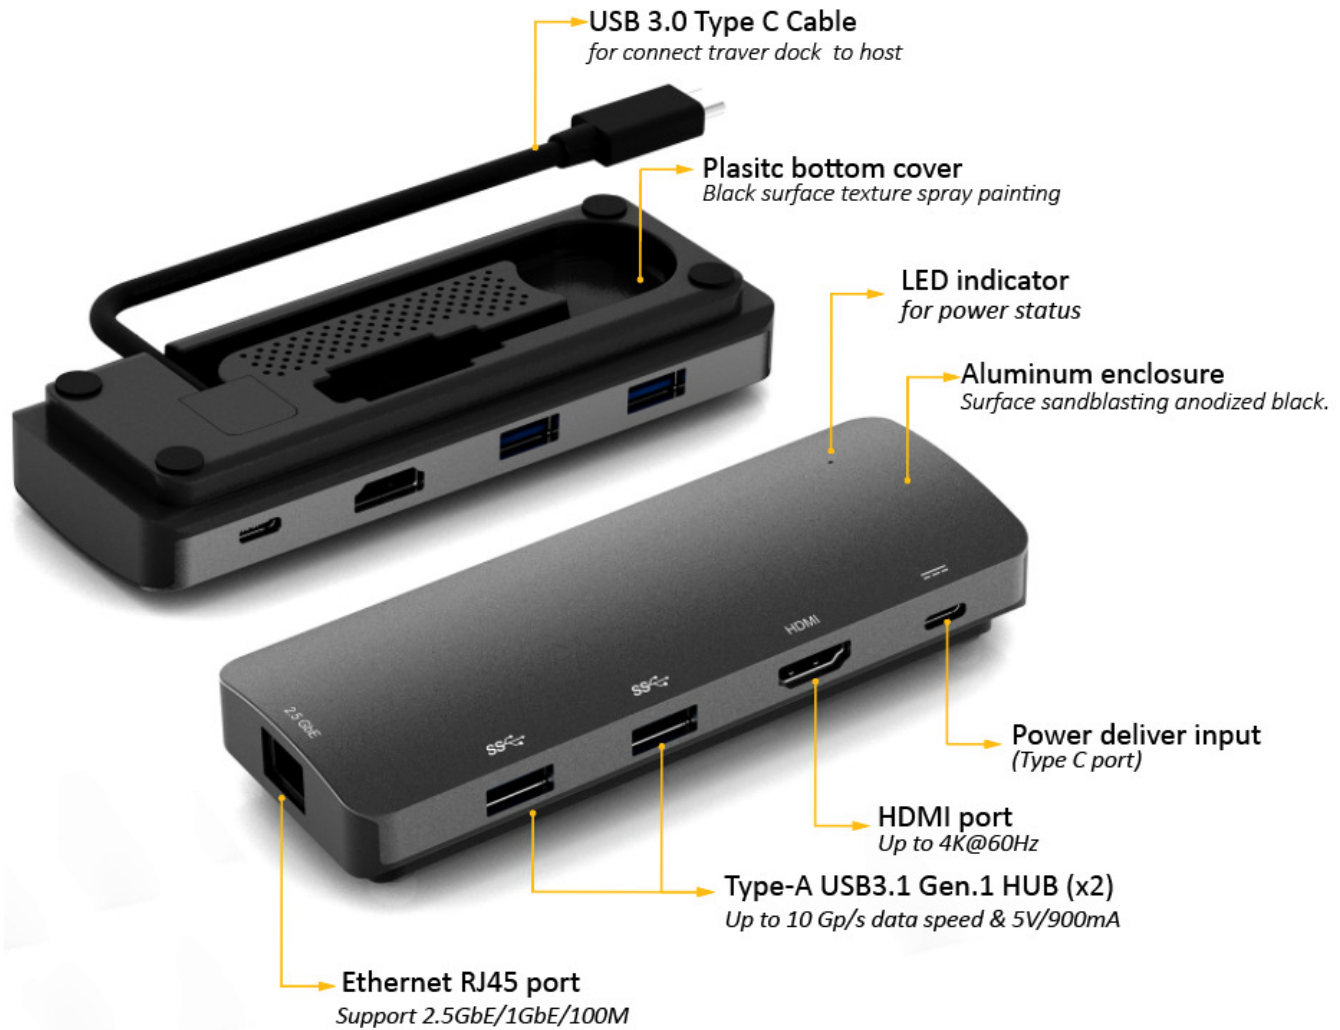

2. Specification

- A. 2 x USB 3.1 Gen1 standard type-A HUB ports connector.
- B. 1 x HDMI port connector.
- C. 1 x USB Type-C charging receptacle connector.
- D. 1 x USB Type-C upstream cable for hosts.
- E. 1 x RJ45 port (Gigabit ethernet).
- F. 1 x LED indicator.

3. Features

- A. High quality Aluminum body for optimized heat dissipation.
- B. Compact and neat design, just more connections are made simply by using a type-c port.
- C. Dimensions: 135.0x50x21.7mm.
- D. Functional LED for Power indicator.
- E. USB3.1 Gen.1 type-C upstream type-c cable plug supports 5Gbps to Host.
- F. USB3.1 Gen.1 type-A (5V/900mA) supports 5Gbps, Backward compatible with USB2.0 and USB1.1.
- G. USB type-C for power deliver supply input, support PD3.0 100W charging (backward compatible with PD2.0).
- H. HDMI Supports 4K@60Hz.
- I. RJ45 (Gigabit ethernet) support 2.5GbE. Backward compatible with 1Gigabit Ethernet (1GbE) or 100 Megabit Ethernet (100MbE). Support USB backwards compatible with USB 2.0.
- J. Bus power.

4. Operating System Support

- A. Mac OS X 10.14.4 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit, Windows 10 32 and 64 bit and future releases.

5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. Retail Color Box x 1.
- B. User's manual x 1.