

# SI- 7915US31C

## Specification



## Revision Notice


**R.1.0 2018.01.03**

Second edition issue.

TABLE OF CONTENTS

1. Appearance .....	4
2. Specification .....	4
3. Features .....	4
4. Operating System Support.....	5
5. Environment .....	5
6. Power & Accessories .....	5

## 1. Appearance

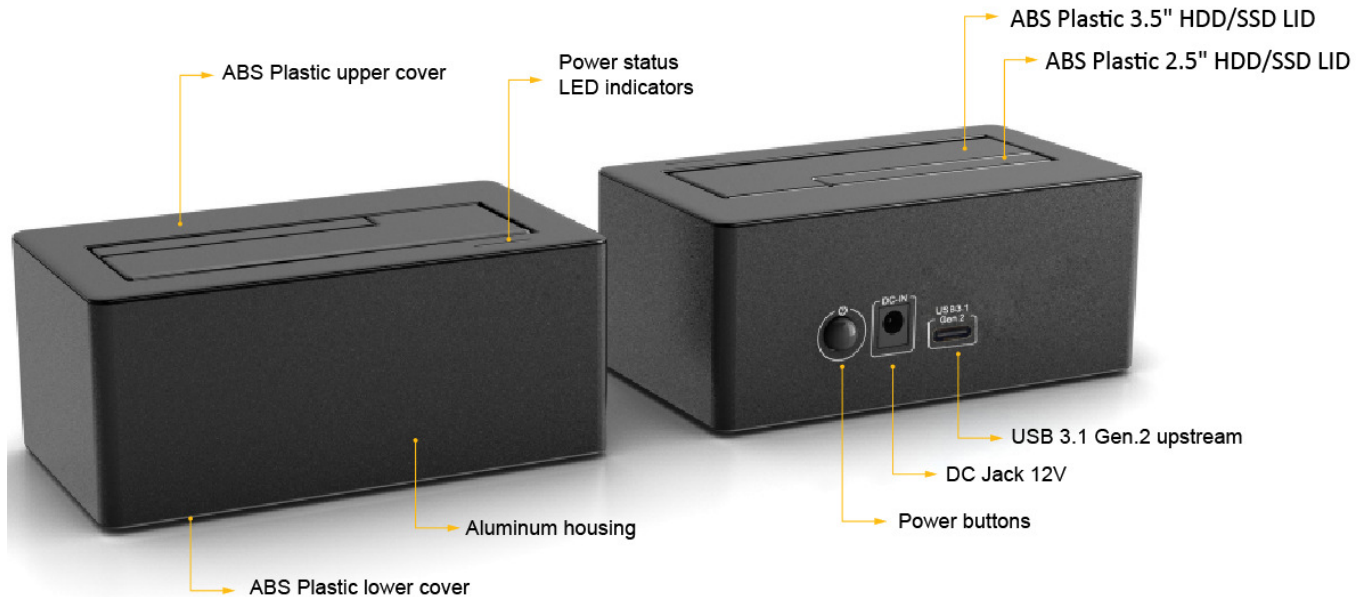

## 2. Specification

### 2.1 IC Controllers

- A. 1 x Asm235CM for USB3.1C Gen.2 to SATA 6G bridge controller.

### 2.2 Interface

- A. 1 x USB3.1 Type C Receptacle.
- B. 1 x DC Receptacle.
- C. 1 x Power push button switch.
- D. 1 x LED indicators for top surface.

## 3. Features

- A. High-strength ABS plastic and High quality aluminum for optimized heat dissipation.
- B. USB 3.1 Gen 2 super speed up to 10 Gbps.
- C. Support DC 12 V power input.
- D. Support 1 x SATA-III 3.5" or 2.5" HDD/SSD, support 10TB HDD/2TB SSD.
- E. Support bus power for 5V/3A(15W).
- F. Top mounted drive LED for power.
- G. Backward compatible with 3.0/2.0/1.1.

#### **4. Operating System Support**

- A. Mac OS X 10.6.x and future releases.
- B. Windows VISTA, 7 32 and 64 bit, Windows 8/8.1/10 32 and 64 bit and future releases.

#### **5. Environment**

- A. Operating Temperature: 5°C ~ 35°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

#### **6. Power & Accessories**

- A. Retail Color Box x 1.
- B. USB 3.1 Type A to Type C cable x 1 meter.
- C. Power adapter x 1 12V/2A
- D. User's manual x 1.