


# SI-8007US31C

## Specification

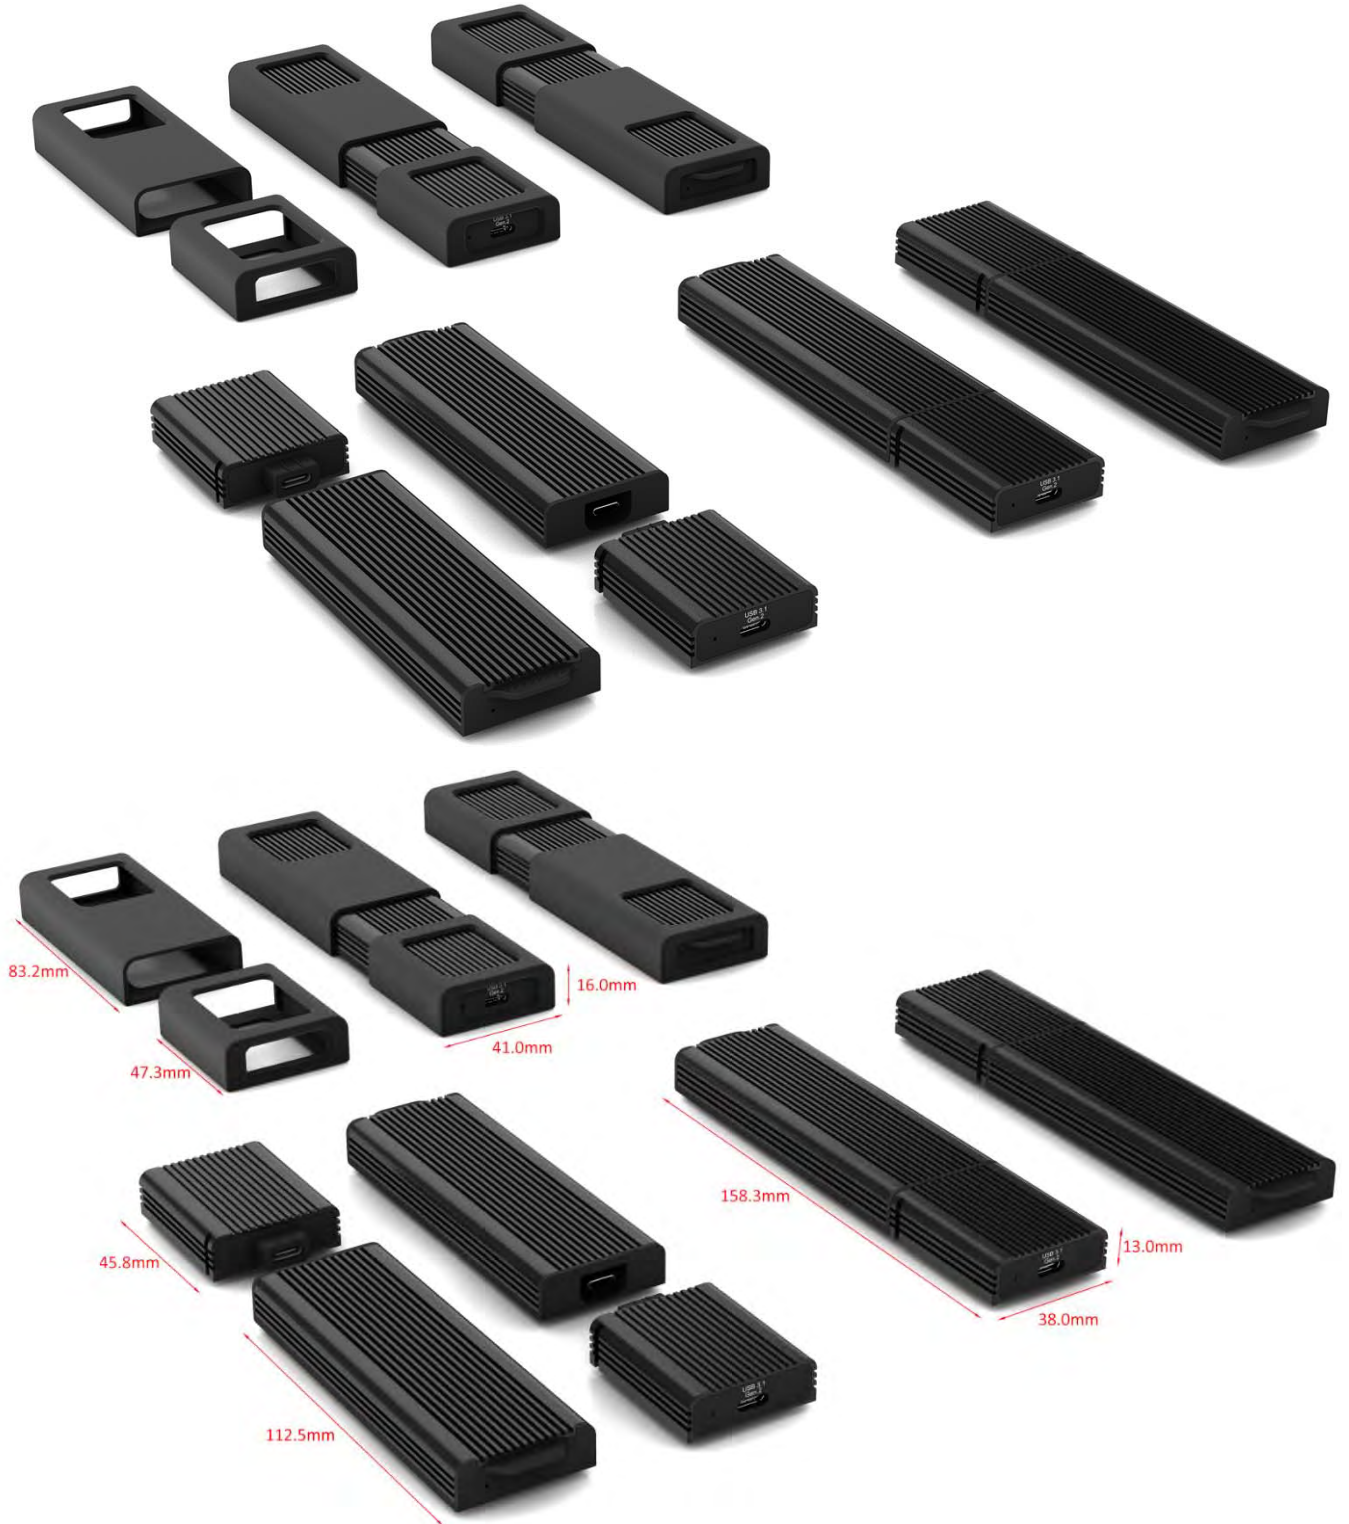

**Revision Notice**

**R.1.0 2019.07.24**

Second edition release.

---

TABLE OF CONTENTS

1. **Appearance** .....4

2. **Specification** .....4


3. **Features** .....4

4. **Operating System Support** .....5

5. **Environment** .....5

6. **Power & Accessories**.....5

## 1. Appearance

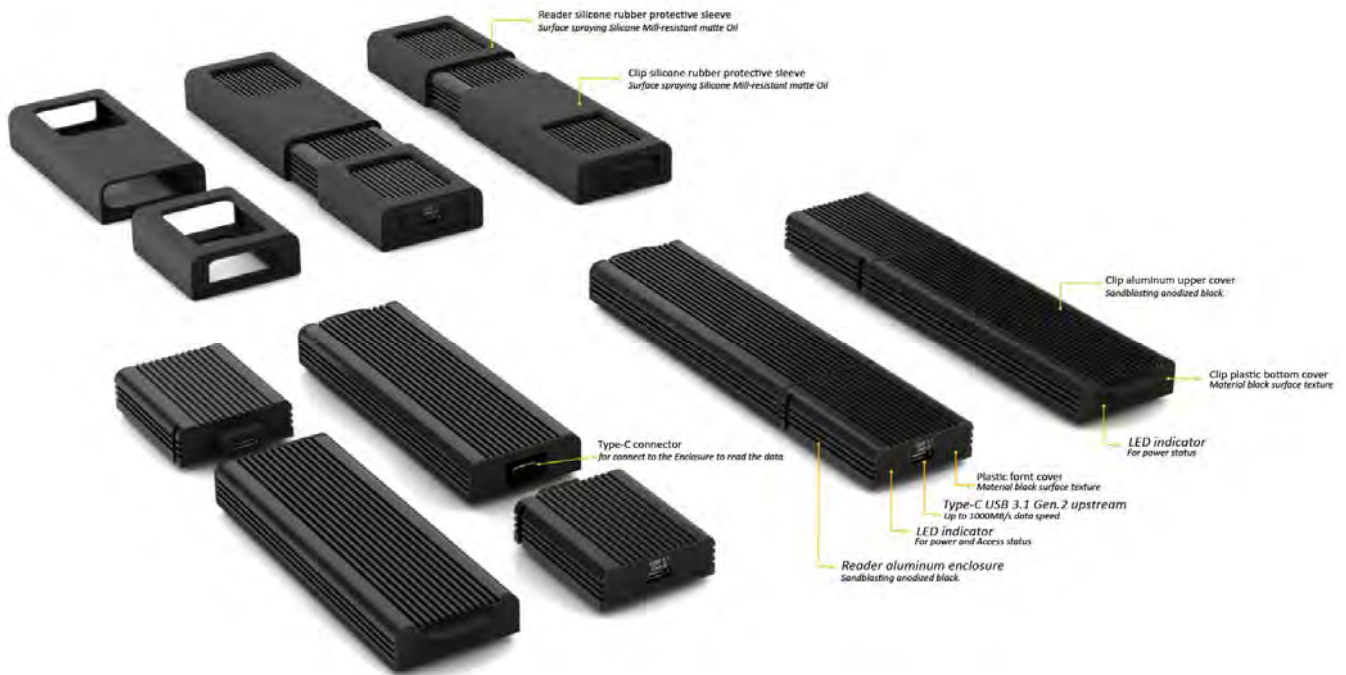

## 2. Specification

- A. 1 x USB3.1 Gen.2 Type-C port.
- B. 1 x M-Key M.2 PCIe NVMe SSD socket (Clip built-in).

## 3. Features

- A. High quality aluminum body for optimized heat dissipation.
- B. Dimensions 112.50x38.00x13.00 mm(dock). 48.50x38.00x13.00 mm(clip, Not included bumper).
- C. Functional LED power and access indicator for dock. Functional LED power indicator for clip.
- D. USB3.1 Gen2 type-C supports 10Gbps to Host, backward compatible with USB2.0 and USB1.1.
- E. Supports 1 x M.2 PCIe NVMe SSD transfer speed up to 1000MB/s (does not support M.2 SATA based SSD). Applicable SSD to sizes 2242/ 2260/ 2280.
- F. Compact and neat design, According to the needs of different consumers, you can

quickly replace the NVMe SSD or replace the entire set of "clip" to use the Dock.  
Consumers can do it with little cost.

- G. Bus power.

#### 4. Operating System Support

- A. Mac OS X 10.14.4 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit, Windows 10 32 and 64 bit and future releases.

#### 5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

#### 6. Power & Accessories

- A. Retail Color Box x 1.
- B. USB 3.1 Gen 2 Type C to Type C Cable (no e-mark) 0.5 Meter. (Option)
- C. Quick Start Guide document x 1.