

SI-8008US31C Dock Specification




Revision Notice
R.1.0 2019.09.23
Initial release.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment	5
6. Power & Accessories.....	5

1. Appearance

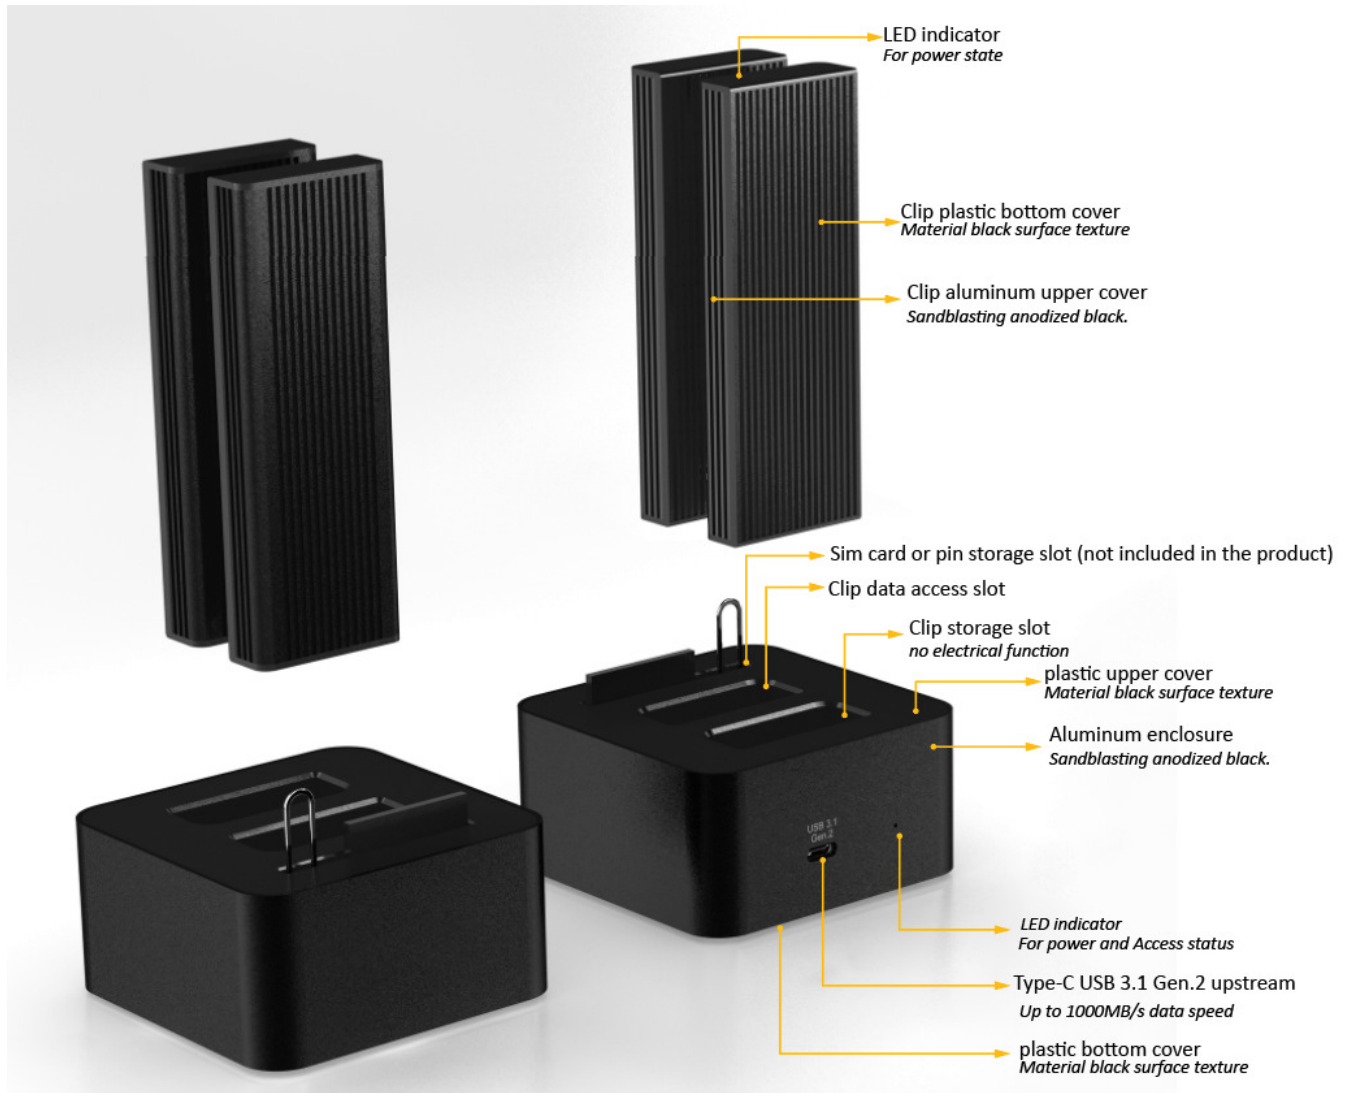

2. Specification

- A. 1 x USB3.1 Gen.2 Type-C port.
- B. 1 x M-Key M.2 PCIe NVMe SSD socket (Trays built-in).

3. Features

- A. High quality aluminum body for optimized heat dissipation.
- B. Dimensions: 80.0x80.0x40.0mm (dock). 107.5x38.0x13.0mm (clip).

- C. Functional LED power and access indicator for dock. Functional LED power indicator for clip.
- D. USB3.1 Gen2 type-C supports 10Gbps to Host, backward compatible with USB2.0 and USB1.1.
- E. Supports 1 x M.2 PCIe NVMe SSD transfer speed up to 1000MB/s (does not support M.2 SATA based SSD). Applicable SSD to sizes 2242/ 2260/ 2280.
- F. Only applicable to 1 set of SSDs for clip data access reading. The other slot is the clip storage box slot. Support small card or pin storage slot.

4. Operating System Support

- A. Mac OS X 10.14.4 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit, Windows 10 32 and 64 bit and future releases.

5. Environment

- A. Operating Temperature: 5°C ~ 35°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. Retail Color Box x 1.
- B. USB 3.1 Gen 2 Type C to Type C Cable (no e-mark) 0.5 Meter. (Option)
- C. Quick Start Guide document x 1.