

SI-8107US31C

Specification




Revision Notice

Rev.	Date	Description
1.0	Feb.25.2021	initial release.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Power & Accessories.....	5

1. Appearance

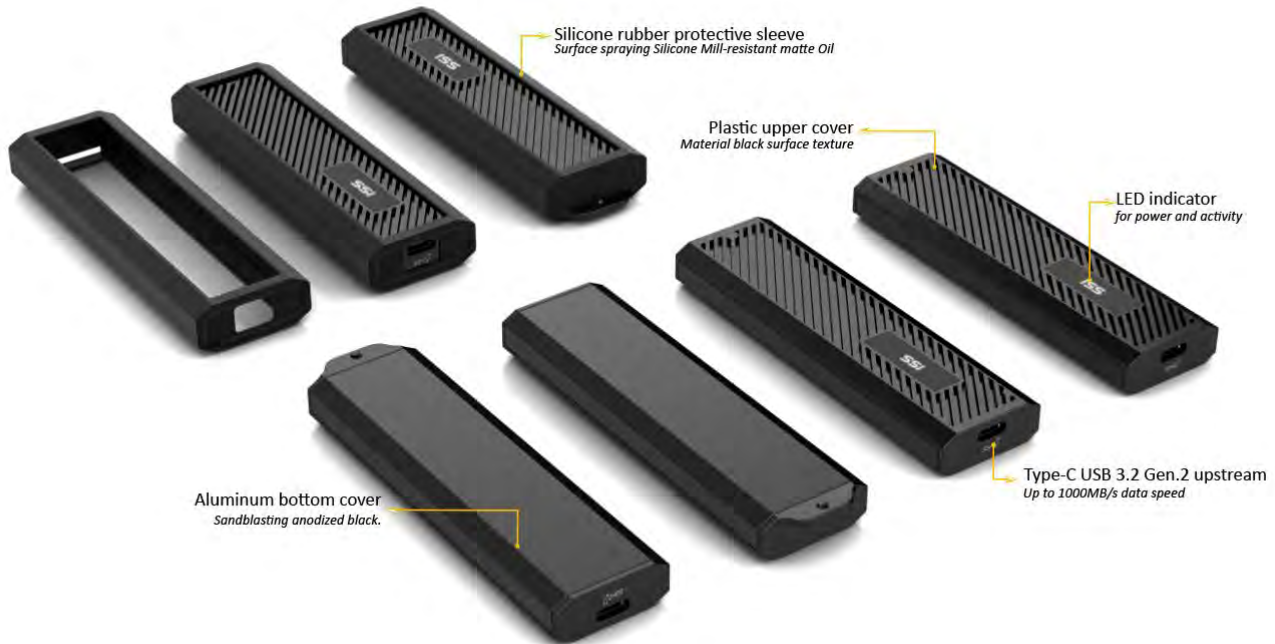

2. Specification

- A. 1 x USB3.2 Gen.2 Type-C port.
- B. 1 x M-Key M.2 PCIe NVMe SSD socket (Clip built-in).

3. Features

- A. High quality aluminum body for optimized heat dissipation.
- B. Dimensions 115.5x32.0x12.5 mm (Not included bumper). 115.5x37.0x17.5 mm (bumper).
- C. Functional LED power & Activity indicator.
- D. USB3.2 Gen2 Type-C Female connector supports 10Gbps to Host, backward compatible with USB3.0 and USB2.0.
- E. Supports 1 x M.2 NVMe SSD transfer speed up to 1000MB/s. And support compatible B+M Key M.2 SATA SSD transfer speed up to 6Gbps/s. Applicable SSD to sizes 2280、2260、2242、2232.

- F. Plug & play, no additional drivers required.
- G. Bus powered. Does not need an external power supply.

4. Operating System Support

- A. Mac OS X 10.15.7 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit, Windows 10 32 and 64 bit and future releases.

5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. Retail Color Box x 1.
- B. USB 3.2 Gen 2 Type C to Type C Cable (no e-mark) 0.5 Meter. (Option)
- C. USB 3.2 Gen.2 Type C to Type C Cable (no e-mark) 0.2 Meter. (Option)
- D. Quick Start Guide document x 1.