

9140US31C

Specification




R.1.0 2018.05.16

Initial release.

TABLE OF CONTENTS

1. Appearance	4
2. Specification	4
3. Features	4
4. Operating System Support.....	5
5. Environment	5
6. Power & Accessories	5

1. Appearance

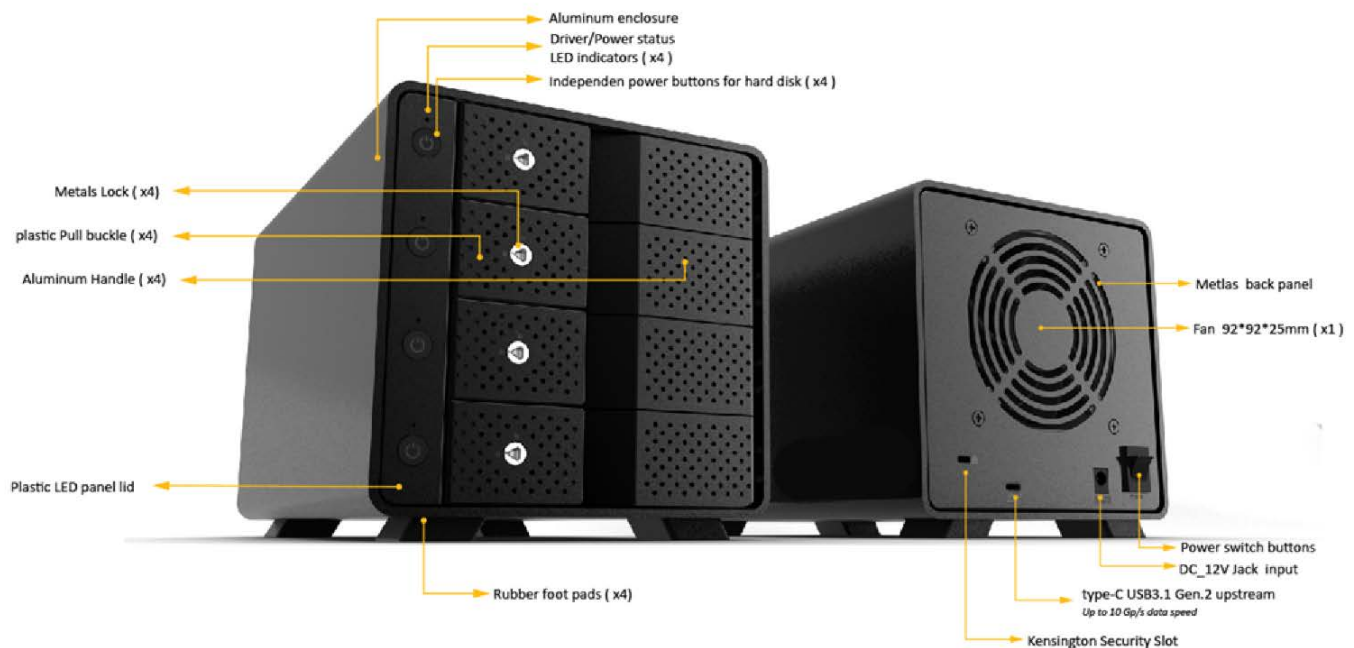

2. Specification

- A. 1 x USB3.1 Gen.2 Type-C upstream ports.
- B. 1 x Kensington Security Slot.
- C. Design will include a power switch and DC power input receptacle.

3. Features

- A. High quality aluminum and metal for optimized heat dissipation.
- B. Support Type-C receptacle USB3.1 Gen.2 data super speed up to 10Gbps transfer rate.
- C. Supports up to 3.5" SATA III HDD. Be compatible with any SATA II or III HDD.
- D. 4 x LED solid red light indicator for Power switch on, link the disk device, blink blue indicator light for access the disk device, Solid HDD red light indicator for /SSD unmount.
- E. Use the 1 x 92*92*25 mm FAN for optimized heat dissipation.
- F. Backward compatible with USB 3.0/2.0/1.1.

4. Operating System Support

- A. Mac OS X 10.3 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit and future releases.

6. Environment

- A. Operating Temperature: 5°C ~ 35°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

7. Power & Accessories

- A. EU/UK/US AC Cable x 1 L=1 meter.
- B. USB C to G Gen2, L=100cm x1
- C. Manual x 1.
- D. Retail Color Box x 1.
- E. Key x2