

SSI-9150HUS31C

Specification



Revision Notice


R.1.0 2019.12.02

Initial release.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Power & Accessories.....	5

1. Appearance

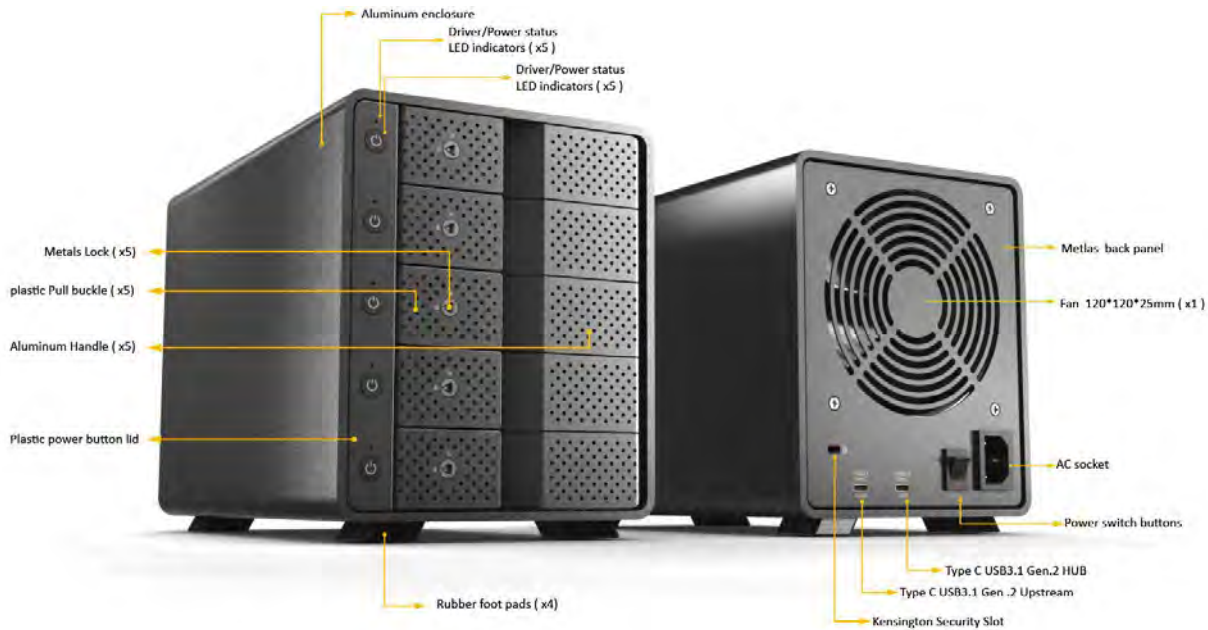

2. Specification

- A. 5 x SATA 6G Ports.
- B. 1 x USB Type C Upstream port.
- C. 1 x USB Type C Downstream port HUB.
- D. 1 x AC power socket.
- E. 1 x Power buttons.
- F. 1 x Kensington security slot.

3. Features

- A. High-quality aluminum and High-strength ABS plastic for optimized heat dissipation.
- B. Type C HUB super speed up to 10Gbps (900mA), support daisy-chain to 2 products.
- C. Type-C USB Receptacle USB 3.1 Gen 2 data super speed up to 10Gbps transfer rate.
- D. Support hard disk Independent power switch, 5 separate hard disk power control.
- E. Use daisy-chain function downlink daisy-chain support up to 2 sets of products.
- F. Internal power supply 120W, support AC 115~230V power input.
- G. Supports 5 x SATA-III 3.5" HDD, Supports 8TB HDD or later.
- H. Use a 120x120x25mm fan at the back of the product (PWM intelligent temperature control function), facilitate air for optimized heat dissipation.
- I. Design will total power switch.
- J. Front mounted drive LED for power and activity.
- K. Backward compatible with USB3.0/2.0/1.1.

4. Operating System Support

- A. Mac OS X 10.6.x and future releases.
- B. Windows VISTA, 7 32 and 64 bit, Windows 8/8.1/10 32 and 64 bit and future releases.

5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. Retail Color Box x 1.
- B. User's manual x 1.
- C. USB 3.1 Gen.2 Type A to Type C (no E-mark) cable x 1 meter. (option)
- D. USB 3.1 Gen.2 Type-C to Type-C (no E-mark) Cable x 1meter. (option)
- E. AC Power Cords (US) x 1.2 meter.
- F. Key lock x 1.