

# SI-9180US31C

## Specification




## Revision Notice

Rev.	Date	Description
1.0	Jan.11.2020	First edition release.

## TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	5
4. Operating System Support.....	5
5. Environment.....	6
6. Power & Accessories.....	6

## 1. Appearance

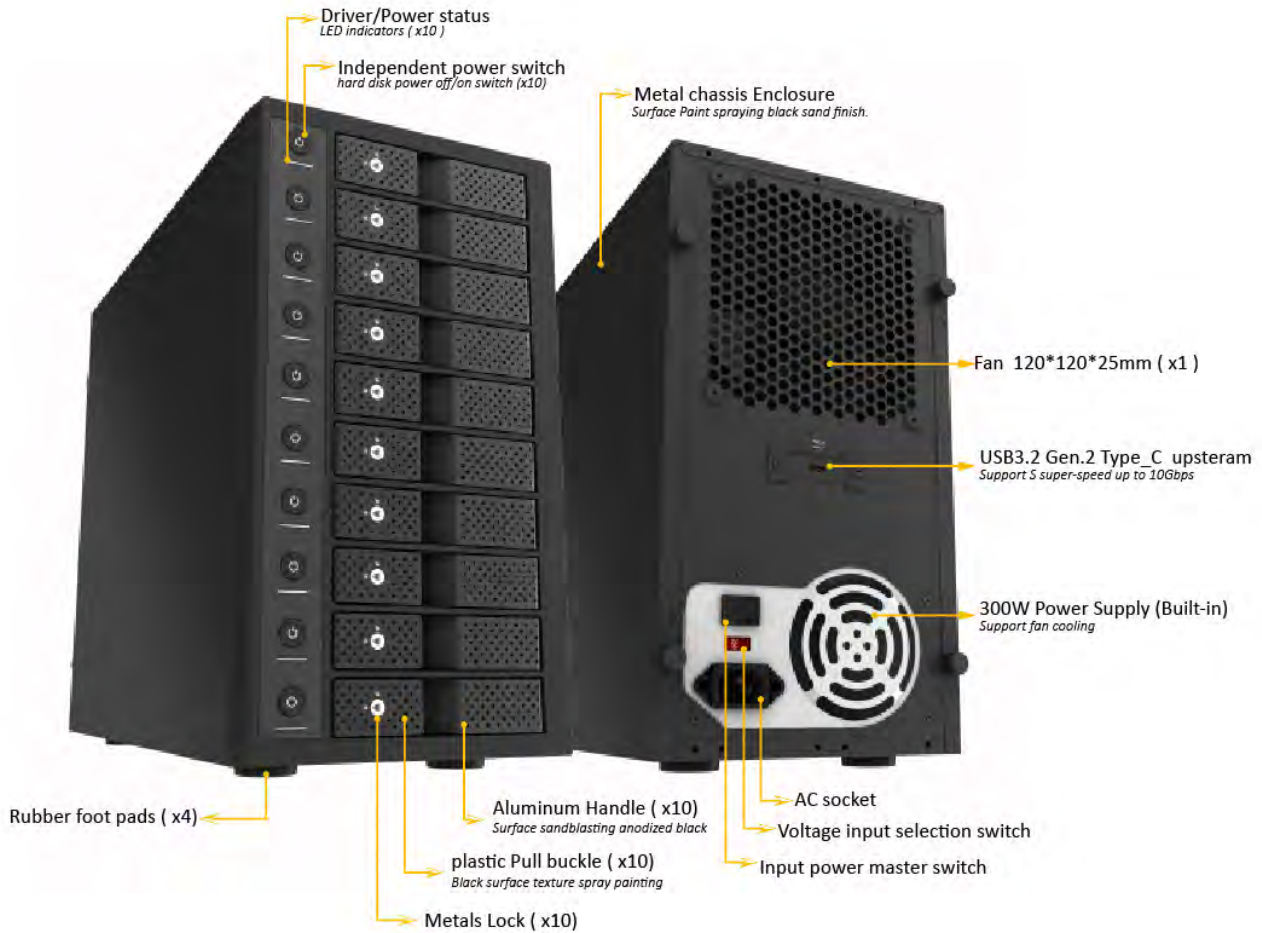

## 2. Specification

- A. 1 x USB3.2 Gen.2 Type C Upstream port.
- B. 10 x SATA 6G Ports (built-in).
- C. 1 x AC power socket.
- D. 1 x Power buttons.

### **3. Features**

- A. High-quality Metals and High-strength ABS plastic.
- B. Dimensions: 385.0x330.0x180.0mm.
- C. Functional LED power and activity indicator.
- D. Upstream USB\_C Receptacle USB 3.2 Gen 2 data super speed up to 10Gbps transfer rate. Backward compatible with USB3.0/2.0/1.1.
- E. Support hard disk Independent power switch, 10 separate hard disk power control.
- F. Internal power supply 300W, support AC 115~230V power input.
- G. Supports 10 x SATA-III 3.5" HDD, Supports 8TB HDD or later.
- H. Use a 140x140x25mm fan at the back of the product (PWM intelligent temperature control function), facilitate air for optimized heat dissipation.

### **4. Operating System Support**

- A. Mac OS X 10.14.4 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit, Windows 10 32 and 64 bit and future releases.

## 5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

## 6. Power & Accessories

- A. Retail Color Box x 1.
- B. User's manual x 1.
- C. USB 3.1 Gen.2 Type C to Type C cable x 1 meter.
- D. AC Power adapter x1
- E. Key x2