


SI-9903KVM

Specification

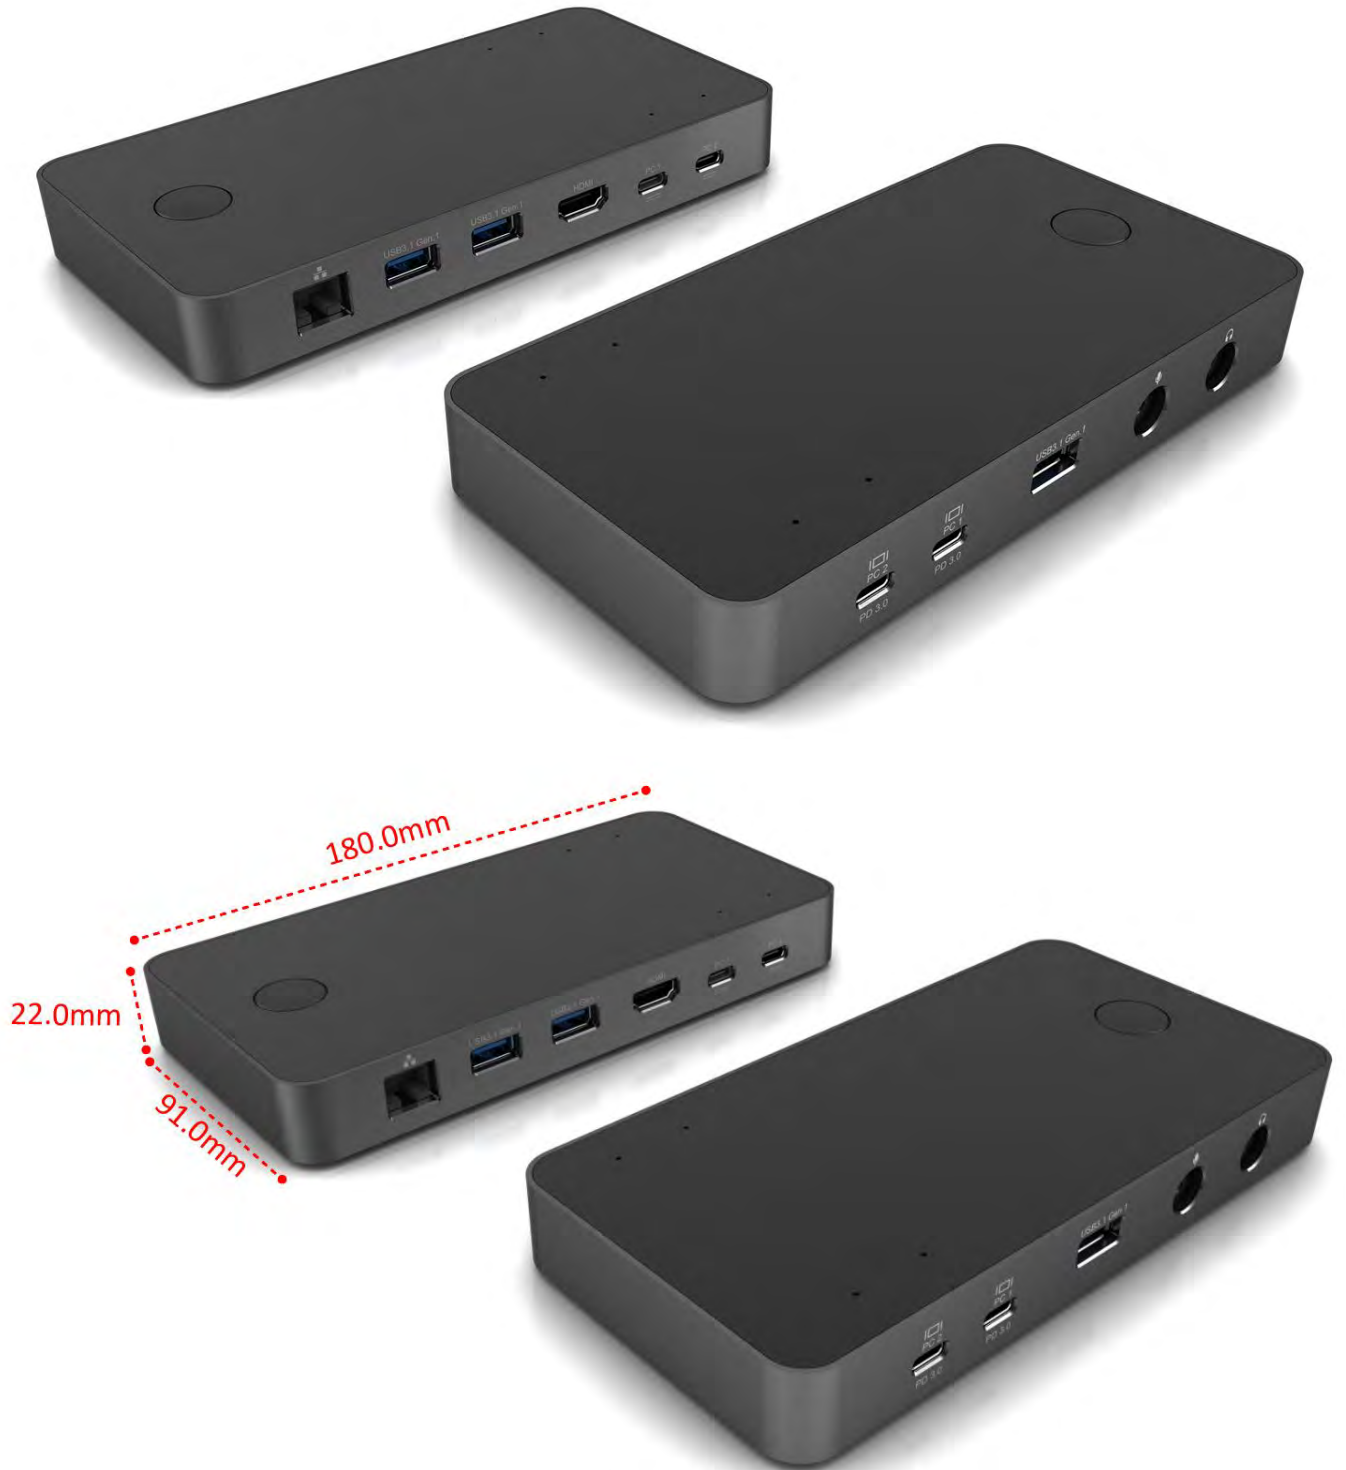

Revision Notice


R.1.0 2019.7.17

Thirdly edition release.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	5
4. Operating System Support.....	5
5. Environment.....	6
6. Power & Accessories.....	6

1. Appearance

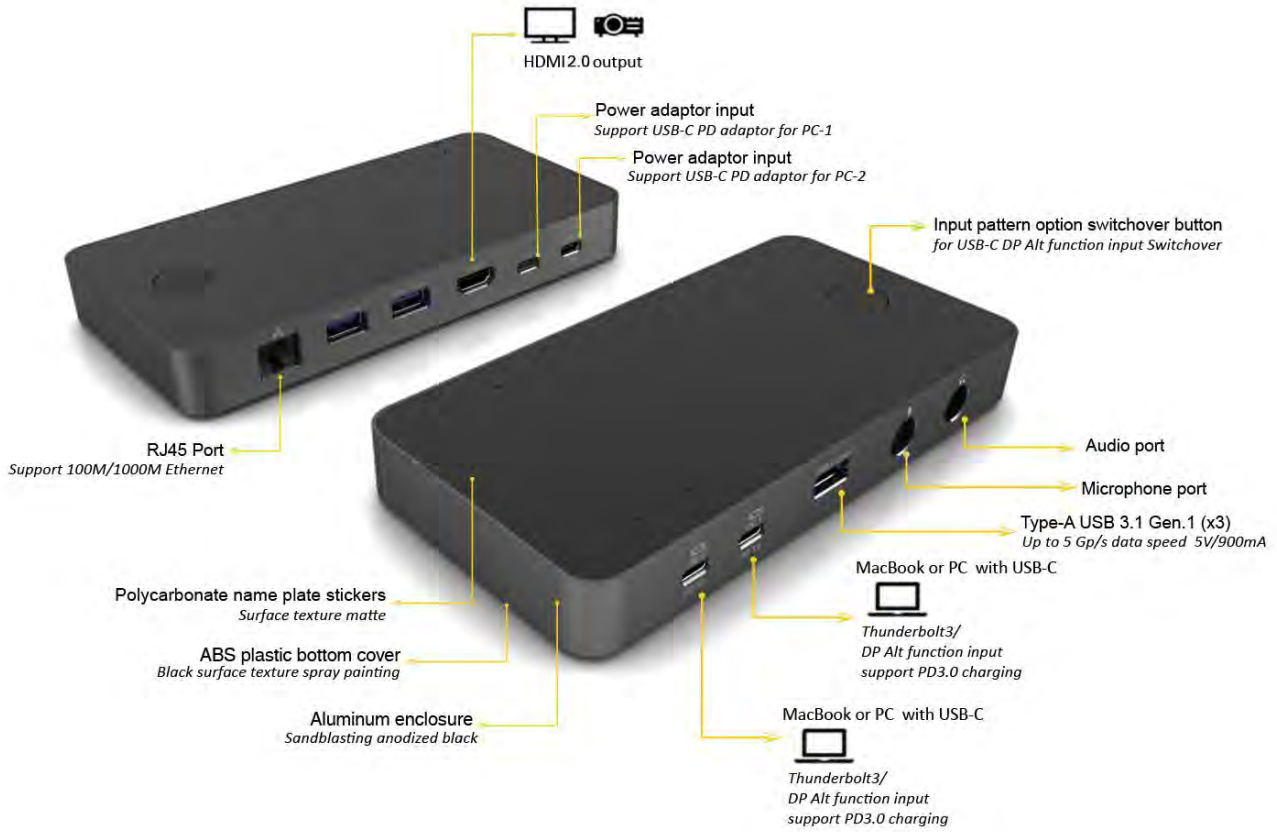

2. Specification

- A. 2 x Type-C DP Alt function upstream ports.
- B. 2 x Type-C PD power input ports.
- C. 3 x USB type-A USB3.1 Gen.1 HUB ports.
- D. 1 x HDMI 2.0 ports.
- E. 1 x Audio + 1 x Microphone ports.
- F. 1 x RJ45 Gigabit LAN ports.
- G. 1 x Pattern option switchover button.
- H. 2 x LED indicators for top surface.

3. Features

- A. High quality Aluminum body for optimized heat dissipation.
- B. Dimensions: 180.00x91.00x22.00mm.
- C. Function LED for USB-C input source indicator (x2).
- D. HDMI 2.0 or DisplayPort support 4K@60Hz output function.
- E. 2 to 1 USB-C KVM switch. One switch to switch the input source for PC-1 USB-C ports and PC-2 ports.
- F. Two USB-C PD 3.0 power supply input, Support 1 to 1 upstream laptop charge.
- G. Two USB-C video input is compatible with thunderbolt 3 or any USB-C with DP-Alternate function, Be compatible with MacBook, thundolt3. Support PD3.0 to charge upstream Laptops.
- H. Support USB3.1 Gen.1 type-A HUB (x 3) up to 5Gb/s data speed @ 5V/900mA.
- I. support gigabit ethernet 100M/1000M LAN port.
- J. Support audio and microphone ports.
- K. Support Bus-powered.

4. Operating System Support

- A. Mac OS X 10.14.4 and future releases.
- B. Windows XP, 7 SP1 32 and 64 bit, Windows 8/8.1 32 and 64 bit, Windows 10 32 and 64 bit and future releases.

5. Environment

- I. Operating Temperature: 5°C ~ 35°C
- J. Operating Humidity: 20%RH ~ 80%RH
- K. Storage Temperature: -20°C ~ 50°C
- L. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. Retail Color Box x 1.
- B. User's manual x 1.