


SI- 9110US31C
3.5" SATA HDD Enclosure
Specification

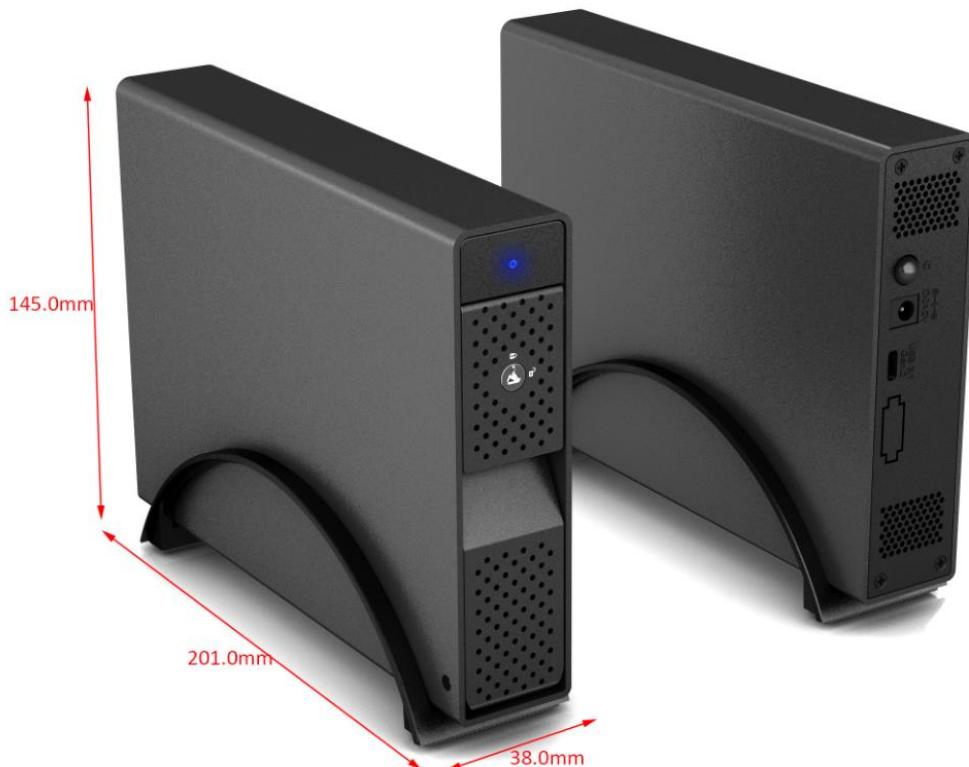


Revision Notice

Rev.	Date	Description
1.0	Mar.14.2020	First edition release.
1.1	Mar.17.2020	Update ID diagram and description.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Block Diagram.....	5
7. Power & Accessories.....	5

1. Appearance

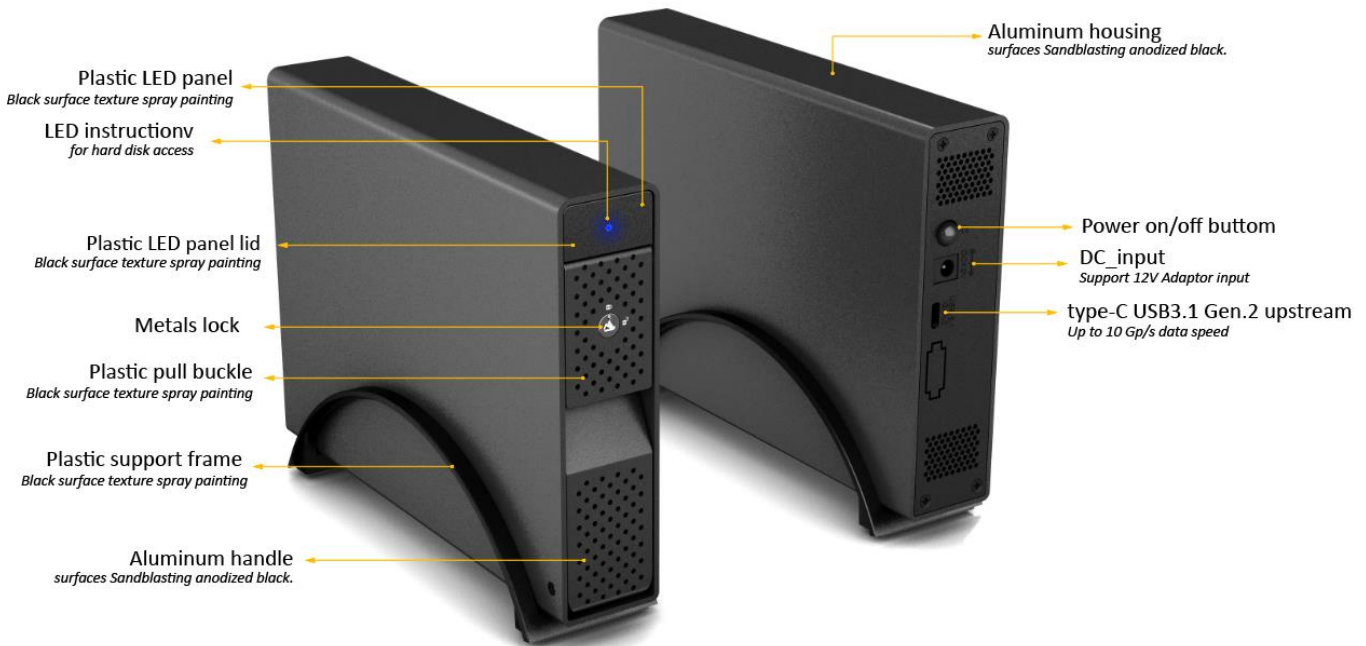

2. Specification

- A. 1 x USB3.2 USB-C upstream ports
- B. 1 x DC-Jack Socket
- C. 1 x Power on/off switch

3. Features

Material: High quality aluminum body for optimized heat dissipation.

Dimensions: 201.00x145.00x38.00mm (exclude rubber feet pads).

- A. Supports up to 1 x 2.5" SSD /3.5" SATA III HDD.
Be compatible with any SATA II or III HDD.
- B. USB3.1 Gen2 type-C cable supports 10Gbps to Host.
Backward compatible with USB3.0 and USB2.0.
- C. Functional LED: LED for Power and Activity indicator.

4. Operating System Support

- A. Mac OS X 10.14.4 and future releases
- B. Windows 10 ,11 and future releases

5. Environment

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. Retail Color Box
- B. External universal Power adaptor (12V/2A)
- C. USB 3.2 USB-C to to C Cable (no e-mark) 1 Meter. (Optional)