


# SI- 9120RUS31C

## 2 Bay RAID 3.5" SATA HDD Enclosure

### Specification

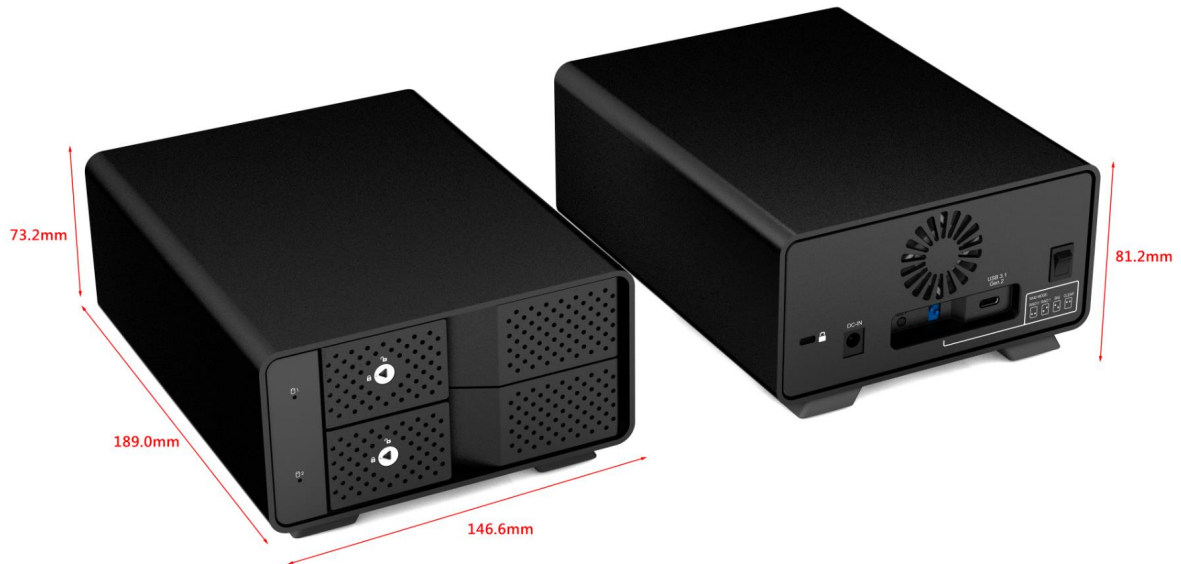


## Revision Notice

Rev.	Date	Description
1.0	Mar.30.2022	First edition release.

## TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	4
4. Operating System Support.....	5
5. Environment.....	5
6. Block Diagram.....	5
7. Power & Accessories.....	5

## 1. Appearance

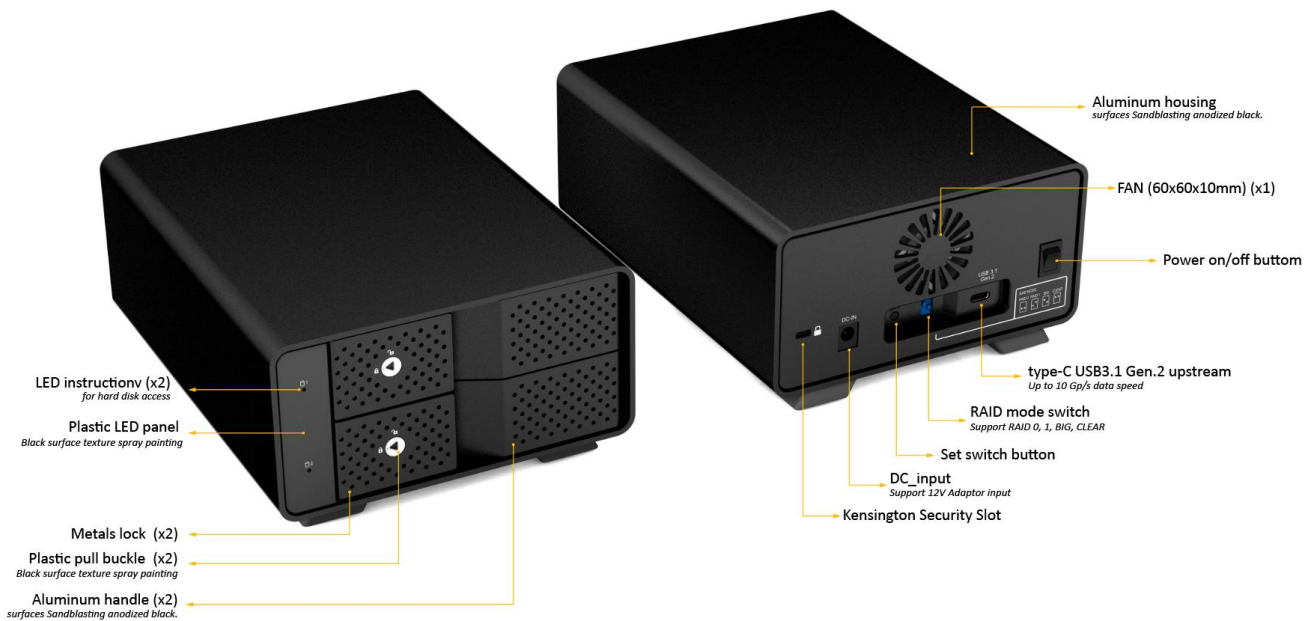

## 2. Specification

- A. 1 x USB3.2 USB-C upstream port
- B. 1 x RAID mode switch
- C. 1 x set switch switch
- D. 1 x DC\_Jack Socket
- E. 1 x Power on/off switch

## 3. Features

**Material:** High quality aluminum body for optimized heat dissipation.

**Dimensions:** 189.00x146.6x73.2mm (exclude rubber feet pads).

- A. Functional LED: LED for Power and Activity indicator.
- B. Supports up to 2 x 2.5" SSD /3.5" SATA III HDD.  
Be compatible with any SATA II or III HDD.
- C. USB3.1 Gen2 type-C captive cable supports 10Gbps to Host,  
backward compatible with USB3.0 and USB2.0.
- D. Supports RAID 0, 1, BIG, CLEAR (Using a 2.5-inch SSD RAID 0 performance can  
over 800MB/s).
- E. Use the 1 x 40\*40\*10 mm FAN for optimized heat dissipation.

#### **4. Operating System Support**

- A. Mac OS X 10.14.4 and future releases
- B. Windows 10 ,11 and future releases

#### **5. Environment**

- A. Operating Temperature: 5°C ~ 55°C
- B. Operating Humidity: 20%RH ~ 80%RH
- C. Storage Temperature: -20°C ~ 50°C
- D. Storage Humidity: 20%RH ~ 80%RH

#### **6. Power & Accessories**

- A. Retail Color Box x 1.
- B. Power Supply: External universal Power adaptor x 1 ( 12V/3A )
- C. USB 3.1 Gen 2 Type A to Type C Cable+C/A Adaptor 1 Meter. (Optional)