

SI-9150RUS31C

5 Bay RAID 3.5" SATA HDD Enclosure

Specification




Revision Notice

Rev.	Date	Description
1.0	Aug 4 .2022	Initial release.

TABLE OF CONTENTS

1. Appearance.....	4
2. Specification.....	4
3. Features.....	5
4. Operating System Support.....	5
5. Block Diagram.....	5
6. Environment.....	6
7. Power & Accessories.....	6

1. Appearance

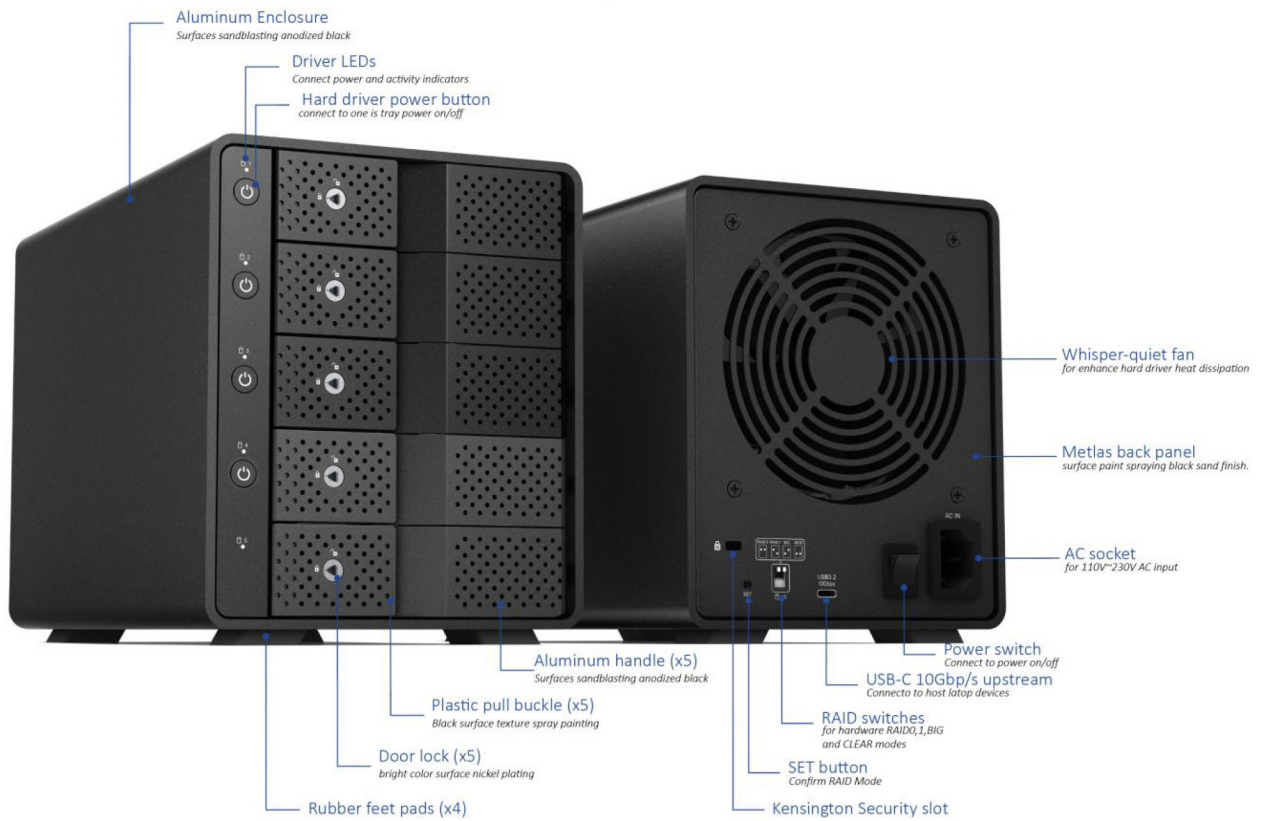

2. Specification

- A. 5 x SATA-III 6G Slots (built-in)
- B. 1 x USB -C 10Gbps Upstream port
- C. 1 x RAID mode switch
- D. 1 x Set switch
- E. 1 x AC socket
- F. 1 x Power switch button
- G. 1 x Kensington security slot

3. Features

Material: High quality aluminum body for optimized heat dissipation

Dimensions: 267.0x150.0x167.7mm (exclude rubber feet pads)

- A. Functional LED for Power and Activity indicator.
- B. Supports up to 5 x 2.5" SSD or 3.5" HDD SATA III HDD.
Be compatible with any SATA II or III HDD. Supports 16TB HDD or later.
- C. USB3.1 Gen2 type-C supports 10Gbps to Host
Backward compatible with USB3.0 and USB2.0.
- D. Support hard disk Independent power switch, 3 separate hard disk power control.
- E. Supports two hard drives RAID mode, RAID 0, 1, BIG, CLEAR (Using a 2.5" SSD RAID 0 performance can over 800MB/s).
- F. Use a 120x120x25mm fan at the back of the product facilitate air for optimized heat dissipation.
- G. Plug & play, automatically installs drivers.

4. Operating System Support

- A. Mac OS X 10.14.4 and future releases
- B. Windows 10 ,11 and future releases

5. Environment

Operating Temperature: 5°C ~ 55°C

Operating Humidity: 20%RH ~ 80%RH

Storage Temperature: -20°C ~ 50°C

Storage Humidity: 20%RH ~ 80%RH

6. Power & Accessories

- A. Key Lock
- B. USB 3.2 Gen.2 USB-A to C (no E-mark) cable x 1 meter. (option)
- C. USB 3.2 Gen.2 USB-C to C (no E-mark) Cable x 1meter. (option)
- D. AC Power Cords (US) x 1.2 meter
- E. Retail Color Box